

Quick Start Guide for Setting up QuikWare Software

STEP 1

You will have received an installation program called QuikWare.exe with an icon like this:




The program is distributed either on a CD or can be downloaded from our website www.cimtechcorp.com. Click the Icon and follow the installation directions. The routine will check your computer system and install required components.

STEP 2


When the installation is complete, you will need to import the license. Start QuikWare and on the menu bar, select File and then click on "Import License".

You will be asked for the location of the .cimlicense file. This will be either on your CD, or if you downloaded the QuikWare, Cimarron will email you your license at time of purchase.

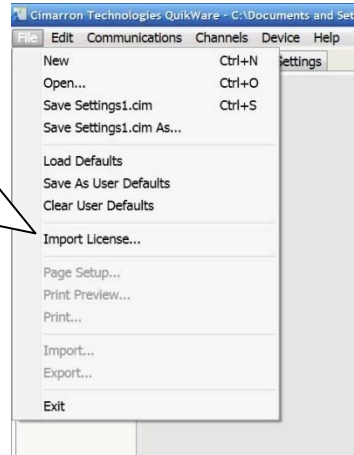

STEP 3

QuikWare software is used to program both the VQS series and the QS series secure voice boards. The VQS board is programmed via the Vertex programming cable and the QS board is programmed with the Cimarron QuikSync USB cable.

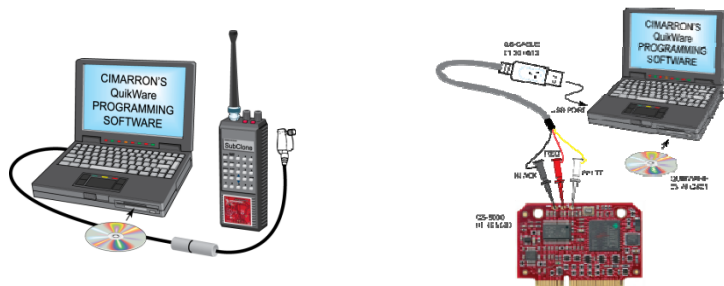


STEP 4

Attach the appropriate cable, and if your device is the VQS series, place the radio in SUB-CLONE mode by turning the radio on while holding down the PTT button and the top Orange button.


STEP 5

Now, select the correct device.

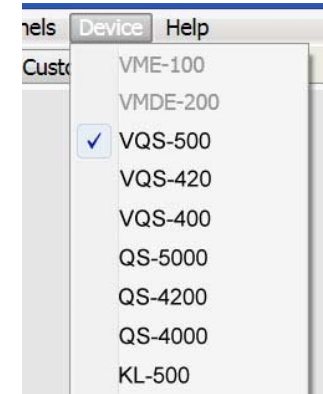

STEP 6

Configure the QuikWare to access the correct communications port on the computer. Select "Communications" and "Setup" and select the COM port that your programming cable is connected. If you are using the Vertex FIF-10 USB adapter, you will also need to change the setting of "Handshake" to "XON/XOFF".

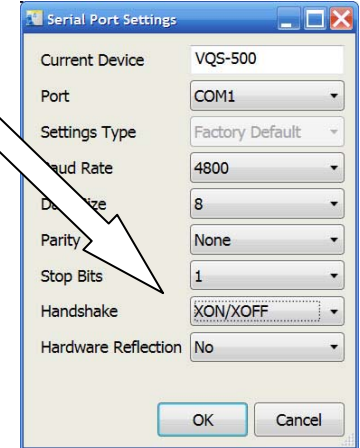

STEP 7

Refer to the VQS or the QS Series Manual for information regarding available programming parameters. Make all required changes.

STEP 8

Write the parameters to the board.

From the menu bar, select "communications". You can choose to "Send All" or if you only changed settings in Global or Channel areas, "Send Global" or "Send Channel".

