

# Quick Start Guide for the VQS Series Secure Voice Module


**STEP 1** Locate the cover of the radio accessory bay, unscrew the four retaining screws, remove the cover and install the VQS Series module. Replace the cover.




**STEP 2** Prepare the radio for programming with the Vertex CE-59 software. Ensure that your version of CE-59 is at least Ver 3.01.



**STEP 3** Read the radio and verify that the radio firmware is at least Ver 1.74.

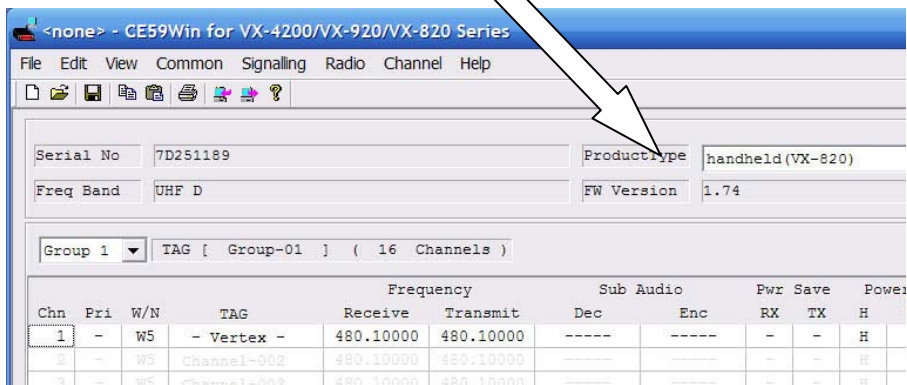


**STEP 4** Then, verify that the radio has recognized the VQS board. Although grayed out, you will notice that Option Unit is defined as VQS-500.

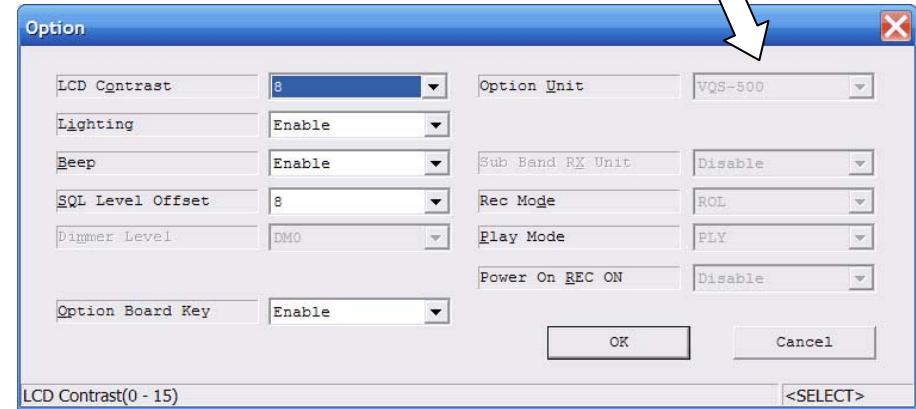

**STEP 5** Designate a button for Emergency and one to control Secure Voice. Select the function "Option SW1"

**STEP 6** Make other required changes, write to the radio. Exit the CE-59 software.

**STEP 7** Turn the radio off, and then hold down the PTT button and the top Orange button and turn power on and release the buttons. This puts the radio in Sub-Clone mode.

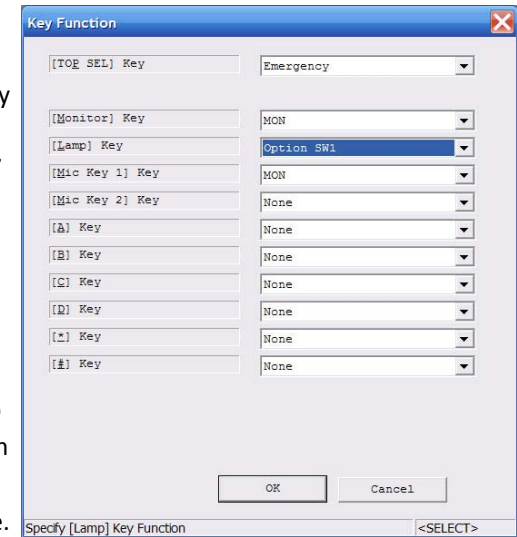

**STEP 8** Start the QuikWare software. From the menu bar, select "Device" and choose VQS-500. Then select "Communications" and "Setup" and select the COM port that your programming cable is connected. If you are using the Vertex FIF-10 USB adapter, you will also need to change the setting of "Handshake" to "XON/XOFF".

Refer to the VQS Series Manual for information regarding available programming parameters.